











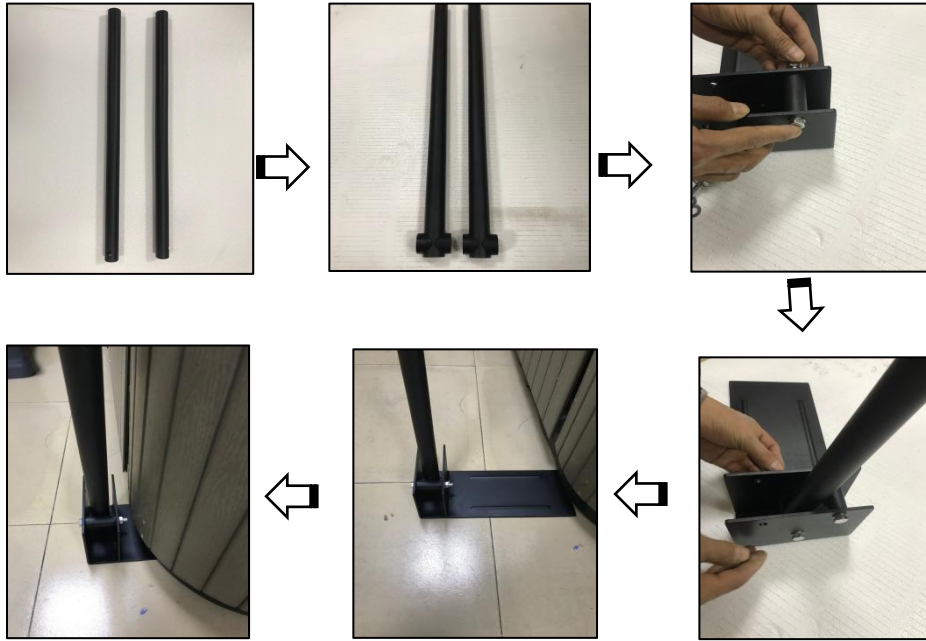
# sx-L-01 Installation Instructions

## 1) Hardware and parts list :


NO.	Item	Photo	QTY	NO.	Item	Photo	QTY
1.	Mounting Brackets		2pcs	2.	Center Couple (one longer, two shorter)		3pcs
3.	Support Arm		2pcs	4.	Upper & Lower Support Arm		2pcs
5.	Bushing		4pcs	6.	Big screws, Flat Washer, Hex Cap Bolt		16pcs
7.	Black Dome Caps		18pcs	8.	Screw Connector		2pcs
9.	Self tapping screws		18pcs	10	Big Caps		4pcs

## 2) Installation Steps:

Step 1: Connect the Support Arm and two Bushings to the Mounting Brackets, using Hex Cap Bolt, Flat Washers, Big screws and Screw Connector, as shown in the below picture. Then Slide the Mounting Brackets to the left and right sides of the spa.



Step 2: Insert the upper&lower support arm into the center couple piece. Then slide it into the support arm which already connected with mounting bracket. Then press the decorative Small Black Dome Caps over the heads of all the exposed screws. Note: the 3pcs center couples are used singly or in combination to small spas and big spas(Spas' size from 1.5 m to 2.5 m).

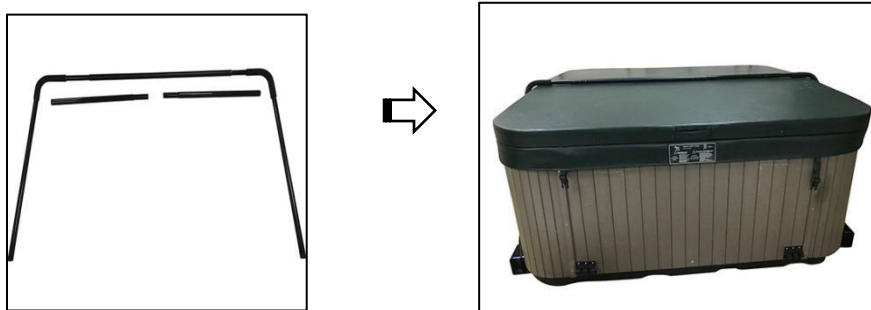

**Step 3:**

Lay the Cover Lift on the spa cover. using the Self Tapping Screws to fasten the Support Arms and Coupler Pieces together. Slide the folded cover into support arms , Finally push the cover down and the cover storing neatly out of the way.



**Note - if installed with the undermount bracket or direct to a conductive surface (including undermount bracket sitting on concrete under the spa), this cover lifter must be earth bonded by your electrician.**